

Coordinating Moldings for YOUR Floor!



**Easy Online
Ordering**

Versatrim.com

**No
Minimums**

VERSATRIM®
The Leading Molding Brand in North America

Same Day Shipping*


*Same Day Shipping: The "Same Day Shipping Policy" applies to stock color priced orders received before 12:00 pm EST. Orders received after 12:00 pm EST will ship no later than the next business day. **Same Day Shipping is for 29 pieces or less.** 30 Pieces or more require up to a 10 day lead time.



YOU ARE A FLOORING GUY!

*Why Let
Moldings
Give You
Headaches?*

*We will create
coordinating moldings for
your floor with absolutely
no minimums!*

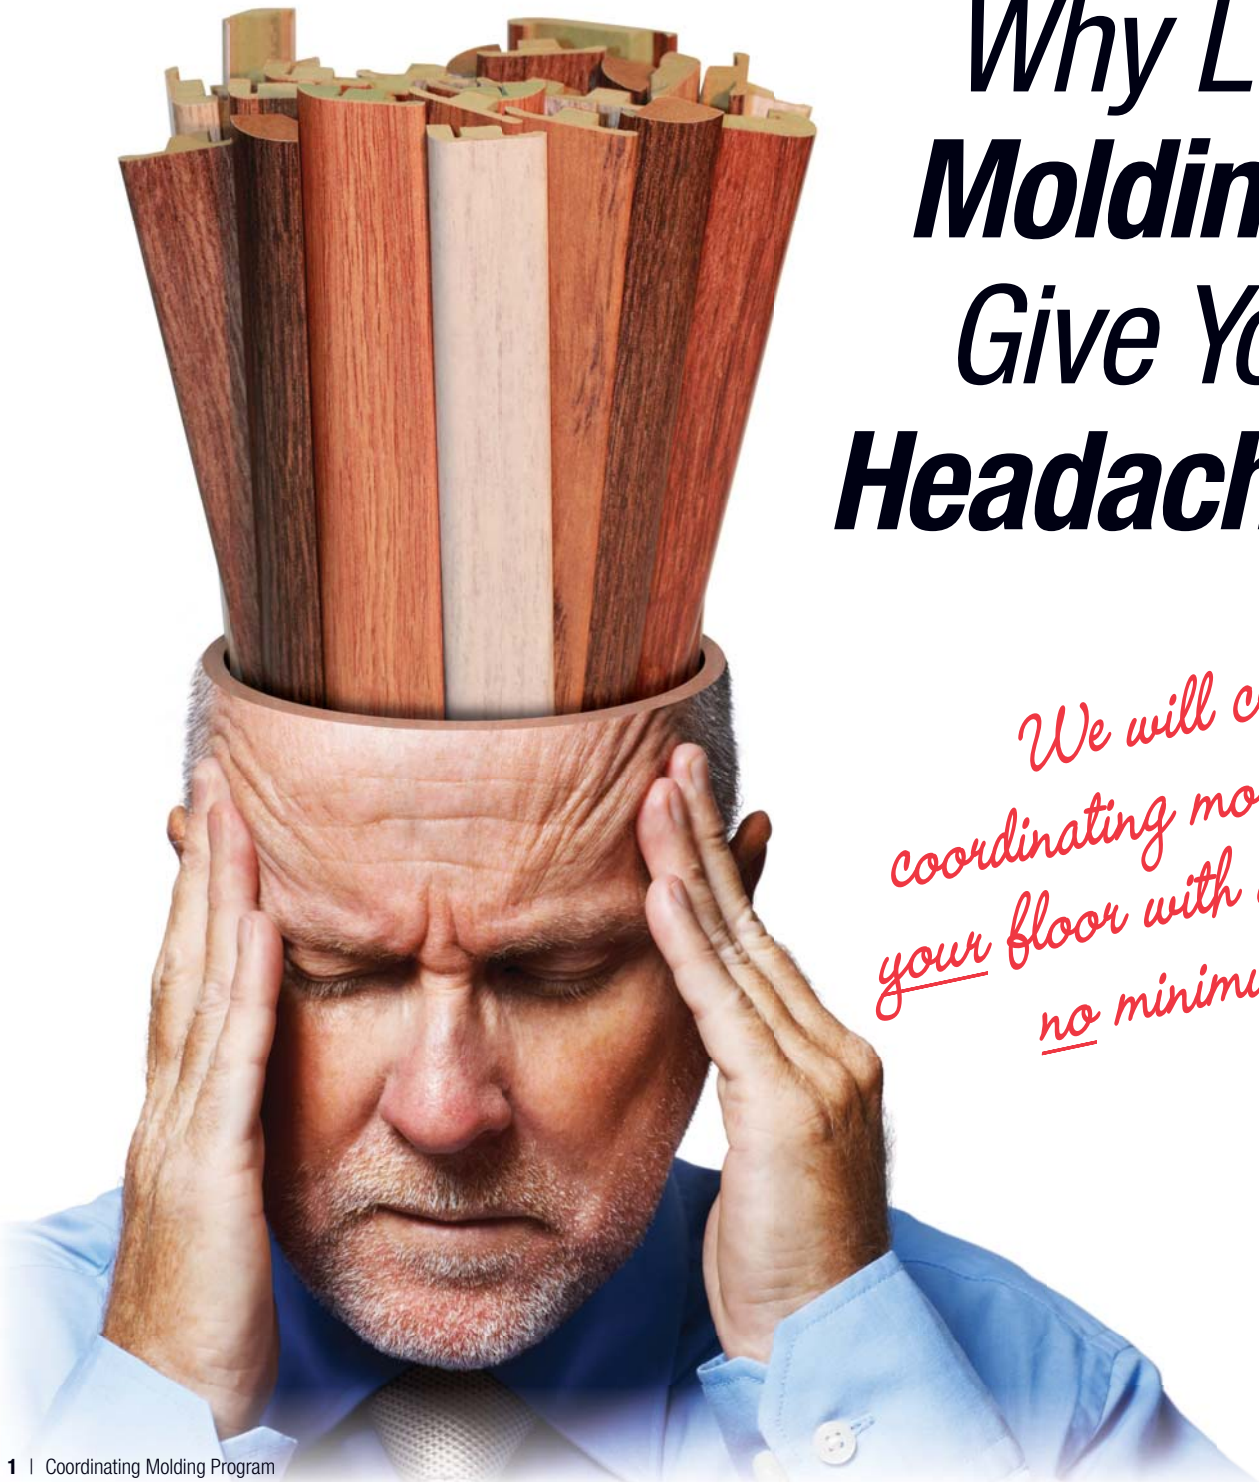

COORDINATING MOLDINGS FOR:



PRODUCTS

MARKETING ASSISTANCE

SHIPPING/LEAD TIME

MOLDING PROGRAMS

VERSATRIM PRICE LIST

**More Colors Added
Every Month!**

No Minimums!

VERSATRIM
The Leading Molding Brand in North America

1.866.200.8132

versatrim.com



WE OFFER A LIMITED LIFETIME
WARRANTY ON ALL OF OUR MOLDINGS!

FOR MORE INFORMATION ON THIS
AND HOW TO INSTALL OUR MOLDINGS
GO TO WWW.VERSATRIM.COM

2021 Versatrim Molding Information Catalog

- 1 Coordinating Moldings Program: Coordinating Moldings for YOUR Floor
- 3 Product Technical Information: Sizes and Applications
- 8 Marketing Assistance: Display Board, Sample Chain, and Color Book
- 9 Shipping/Lead Time: Free Shipping Policy, Transit Times, and Quantities
- 11 How To Order/Program Options: Ordering Made Easy
- 13 Additional Products: TiteGrab Adhesive, Matching Stair Solutions, and Stair Riser
- 14 Versatrim Price List

SlimTrim Technical Information & Applications*

SlimTrim

Our SlimTrim **3-in-1 Molding** functions as a Reducer, T-Molding, and End Cap. Comes with SlimTrack & Versatrack Shim for floors up to 1/4" (6.35mm) or dowels for floors up to 3/4" (19mm). See illustrations below for details.

Surface Material: High Wear Resistant Aluminum Oxide Laminate

Core Material: PVC

SlimTrack

To be used with SlimTrim for floors up to 1/8" (3mm) thickness. Also, used in conjunction with the Versatrack Shim for 1/8"-1/4"* (3-6.35mm). See illustrations below for details.



Material: Cold Roll Steel

* For floors thicker than 1/4" (6.35mm), use dowel installation

Dowel

To be used with SlimTrim for floors up to 3/4" (19mm). Comes as a tree of 8 dowels.


Material: High Density Polyethylene

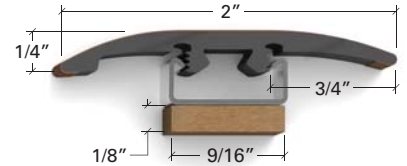

LVT Floors

1 Reducer:

Up to 1/4"
(0-6.35mm)*




Track

2 Transition:

1/16 to 1/8" 1/8-1/4"
(1.6-3mm)* (3-6.35mm)*



Track




Shim

3 End Cap:

(Hard Surface to Carpet)

Up to 1/4"
(0-6.35mm)*




Track Shim Carpet Tap
Down Trim

WPC Floors

1 Slim Trim-P29

as a **Reducer**

1/4-3/8"
(6.35-9.5mm)*




SlimTrack

Shim

2 Slim Trim-P54

as a **Transition**

1/4-3/8"
(6.35-9.5mm)*




SlimTrack

2 Shims

Laminate Floors

1 Reducer:


Up to 3/4"
(0-19mm)*



Must Be Glued to
Non-Floating Surface

2 Transition:

Up to 3/4"
(0-19mm)*




Dowel

3 End Cap:

(Hard Surface to Carpet)

Up to 3/4"
(0-19mm)*

A Carpet Tap
Down Trim**
MUST be Used
When Installing
Slim Trim on
Carpet




Carpet Tap
Down Trim

**Sold at your local hardware store


*All references to flooring thickness refer to the total thickness of all members of the floor installation being laid upon the subfloor. This typically is comprised of the flooring plank, e.g. Vinyl or Laminate, the underlayment, either attached or loose lay and any additional vapor barriers.

**The installation instructions shown on this page are suggestions of how to install our moldings. Versatrim does not assume responsibility for any product failure or liability due to installations that are in violation of the flooring manufacturer's installation guidelines and/or warranties.


Installing SlimTrim on Concrete*




Install flooring planks, leaving 1 inch gap for molding installation. Draw line on flooring for hole placement. Using a 1/4" concrete drill bit, pre-drill 2" deep holes. With pencil, mark on floor the location of each dowel. **BE SURE TO VACUUM PRE-DRILLED HOLES.**




Lay a flat object over flooring and measure from the concrete at the center between the flooring up to the bottom of your object. This will give you the distance to use on the **Dowel Cutting Template** to the right.



Carefully cut or break dowels from Dowel Tree. Use the **Dowel Cutting Template** to the right to find your measurement on the template and lay your dowel over the number that matches your distance measurement.



With dowel on template, use a utility knife to cut dowel as indicated on **Dowel Cutting Template**. Repeat with all dowels that are to be used.




Clean floor and molding as directed below:

CLEANING PREPARATION FOR BOTH SURFACES:


Preparing the floor & molding as outlined is mandatory to achieve the required bonding strength.

1. Use a damp cloth (water only) to clean both surfaces of loose particles or surface films.
2. Roughen the surfaces with sandpaper (100-150 grit), sanding sponge or metal brush. For flooring, only roughen up area that will be covered (1.25" to 1.5").
3. Degrease both surfaces to remove all traces of oil, grease, dust, and fingerprints by using a solvent such as methyl ethyl ketone (MEK), acetone or isopropyl alcohol.
4. Let both surfaces dry thoroughly before applying adhesive.




Slide dowels into groove on bottom of the Slim Trim molding and position them according to template. Line up dowels with pre-drilled holes. Adjust dowels as needed.


NOTE: Dowels have to fit tightly for the molding to function properly. If you find the dowel is too difficult to slide in, take 100/120 grit sandpaper, lay it flat on a surface and sand down the dowel head slightly with a couple of passes (See Detail A at the right).




DETAIL A



Using both hands, start at one end and gently push molding 1/4" down at a time. It should take several passes to push molding all the way down. Best hand position is holding dowel between pointer fingers and pushing down with thumbs **directly over** dowel. **DO NOT TRY TO PUSH ENTIRE MOLDING IN ALL AT ONCE.**



When molding is a finger's width from the floor, insert tip of glue gun under one edge of molding and apply a polyurethane construction adhesive along one side of the flooring. **MAKE SURE YOU APPLY ADHESIVE TO ONLY ONE SIDE OF THE MOLDING AND THAT ALL SURFACES THAT THE ADHESIVE TOUCHES IS DUST AND DEBRIS FREE.**



When finished applying adhesive, start again at beginning of molding and push dowels all the way down until molding is secure. Use a rubber mallet to gently tap on top of each dowel until molding sits flush. Use pencil marks as reference.

*The installation instructions shown on this page are suggestions of how to install our moldings. Versatrim does not assume responsibility for any product failure or liability due to installations that are in violation of the flooring manufacturer's installation guidelines and/or warranties.


Technical Information — Sizes

T-Molding

T-Moldings are commonly used in doorways to join two laminate floors in adjoining rooms. Also recommended when making a transition from laminate floor to another floor that is approximately the same height. **Available as Standard or Moisture Proof.**

Surface Material: High Wear Resistant Aluminum Oxide Laminate

Core Material: *Standard:* Moisture Resistant MDF. *Moisture Proof:* Exterior Grade Composite Wood Product

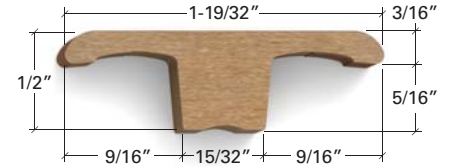


Reducer

Reducers are used to transition from laminate floors to floors of different height with a minimum height difference of 1/4" (6.35mm). **Available as Standard or Moisture Proof.**

Surface Material: High Wear Resistant Aluminum Oxide Laminate

Core Material: *Standard:* Moisture Resistant MDF. *Moisture Proof:* Exterior Grade Composite Wood Product

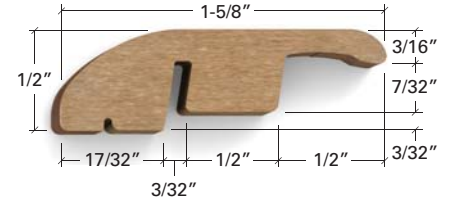


End Cap

End Caps are used to transition from laminate to carpet, masonry (fireplaces), sliding doors and other exterior door jambs. **Available as Standard or Moisture Proof.**

Surface Material: High Wear Resistant Aluminum Oxide Laminate

Core Material: *Standard:* Moisture Resistant MDF. *Moisture Proof:* Exterior Grade Composite Wood Product

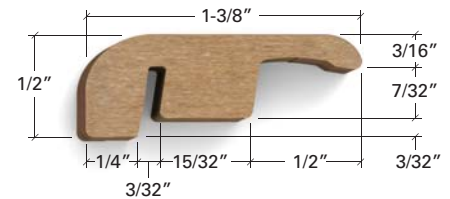


VersaEdge

The Standard VersaEdge Stair Nose combines style and function to enhance the beauty of a staircase or step. For use on flooring with an overall thickness of up to 3/4" (19 mm)*.

Surface Material: High Wear Resistant Aluminum Oxide Laminate

Core Material: PVC

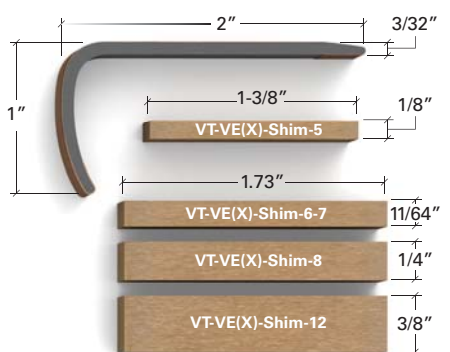

VT-VE(X)-Shim (Sold separately)

Optional use with VersaEdge for **flush installations**. Shim-5 for 5-5.5mm* floors, Shim-6-7 for 6-7mm* floors, Shim-8 for 8mm* floors, and Shim-12 for 12mm* floors. See installation examples at bottom of page 7.


Material: Standard MDF/HDF

VersaEdge Extra Tall

The Extra Tall VersaEdge Stair Nose is 1.5" tall to fit staircases or steps that require a longer overhang. For use on flooring with an overall thickness of up to 3/4" (19 mm)*.

Surface Material: High Wear Resistant Aluminum Oxide Laminate

Core Material: Aluminum

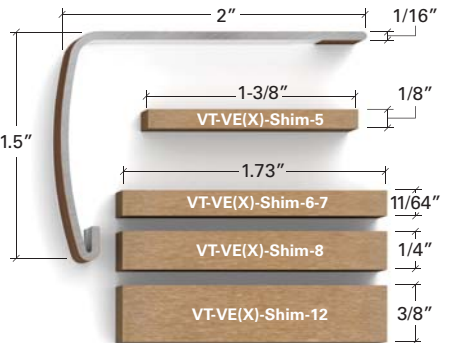

VT-VE(X)-Shim (Sold separately)

Optional use with VersaEdge Extra Tall for **flush installations**. Shim-5 for 5-5.5mm* floors, Shim-6-7 for 6-7mm* floors, Shim-8 for 8mm* floors, and Shim-12 for 12mm* floors. See installation examples at bottom of page 7.


Material: Standard MDF/HDF

Stair Nose

The Landing Stair Nose combines style and function to enhance the beauty of a staircase or step. **Available as Standard or Moisture Proof.**

Surface Material: High Wear Resistant Aluminum Oxide Laminate

Core Material: *Standard:* Moisture Resistant MDF. *Moisture Proof:* Exterior Grade Composite Wood Product

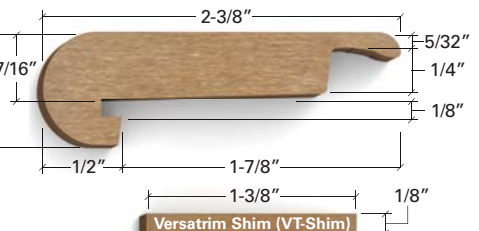

Versatrim Shim (VT-Shim) (Sold separately)

Used to raise the Stair Nose when used for 3/8-1/2" (9.5-12.7mm)* flooring.

Material: Standard HDF

*All references to flooring thickness refer to the total thickness of all members of the floor installation being laid upon the subfloor. This typically is comprised of the flooring plank, e.g. Vinyl or Laminate, the underlayment, either attached or loose lay and any additional vapor barriers.

SlimCap

Low profile End Cap for floors up to 1/2" (12.7mm).

Surface Material: High Wear Resistant Aluminum Oxide Laminate

Core Material: PVC

Wall Base

Base molding conceals the joint between an interior wall and the floor. Also used to protect the walls from scuffs and floor cleaning tools.

Surface Material: Decorative Paper

Core Material: Standard MDF

Colonial Base – Available in White Paint Grade Only

Extra tall Colonial Base molding conceals the joint between an interior wall and the floor. Also used to protect the walls from scuffs and floor cleaning tools.

Surface Material: Decorative Paper

Core Material: Standard MDF

Quarter Round

Quarter Rounds are used to conceal the required expansion space between the wall and the laminate flooring. **Available as Standard or Moisture Proof.**

Surface Material: Decorative Paper

Core Material: **Standard:** Standard MDF. **Moisture Proof:** Exterior Grade Composite Wood Product

Base Shoe – Available in White Paint Grade Only

Base Shoes, like Quarter Rounds, are used to conceal the required expansion space between the wall and the laminate flooring.

Surface Material: Decorative Paper

Core Material: Standard MDF

Versatrack Shim

To be used with T-Molding in conjunction with the Versatrack for floors from 15/32"-45/64" (12-18mm)* thickness and with Reducer & End Cap in conjunction with the Versatrack for floors from 15/32"-5/8" (12-16mm)* thickness. *See installation examples on page 7.*

Material: Standard HDF

Versatrack (Metal Track)

To be used with T-Molding for floors from 23/64"-15/32" (9-12mm) thickness* and Reducer & End Cap for floors from 9/32"-15/32" (7-12mm)* thickness. Can also be used with T-Molding in conjunction with the Versatrack shim for floors from 15/32"-45/64" (12-18mm)* thickness and with Reducer & End Cap in conjunction with the Versatrack shim for floors from 15/32"-5/8" (12-16mm)* thickness. *See installation examples on page 7.*

Material: Cold Roll Steel

For floors thicker than 45/64" (18mm)* for T-Molding and 5/8" (16mm)* for Reducer & End Cap, please feel free to call one of our customer service representatives for assistance.

Thin Track — Versatrim Thin

To be used with T-Molding, Reducer, and End Cap for floors from 19/64"-3/8" (7.5-9.5mm)*.

Material: Impact Polystyrene

For 7mm* floors you must use the Versatrack metal track

Thick Track — Versatrim Thick

To be used with T-Molding, Reducer, and End Cap for floors from 3/8-1/2" (9.5-12.3mm)*.







Material: Impact Polystyrene

For 7mm* floors you must use the Versatrack metal track

*All references to flooring thickness refer to the total thickness of all members of the floor installation being laid upon the subfloor. This typically is comprised of the flooring plank, e.g. Vinyl or Laminate, the underlayment, either attached or loose lay and any additional vapor barriers.



INFORMATION ABOUT OUR MOISTURE PROOF MATERIAL

- The core material is not considered 100% water proof. However, it is moisture, rot, and termite resistant.
- It is treated with zinc borate and manufactured with phenolic resins.
- It has no added urea formaldehyde.
- It is made using sustainable materials and contributes to industry green building programs.
- Caliper swell when saturated in water improves 1-1/2 to 5 times comparing our moisture proof core material to moisture resistant grade and typical MDF.
- In comparison to MDF in internal bucket testing, our moisture proof material exhibited substantially smaller edge cracks after exposure and air drying than typical MDF.

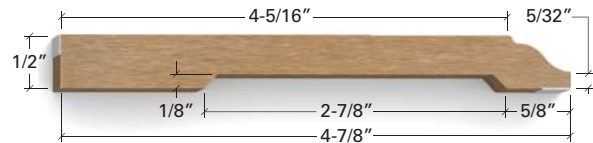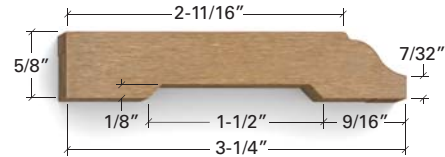



Technical Information — Applications*

This is how the Versatrim molding covers 9/32-45/64" (7-18mm) Flooring. The answer to the problem is a program of moldings designed to work with a metal track.

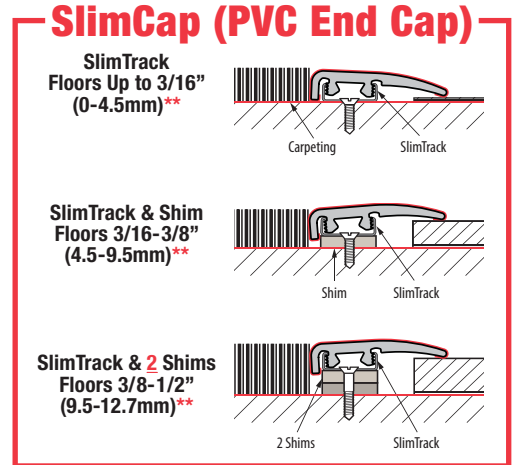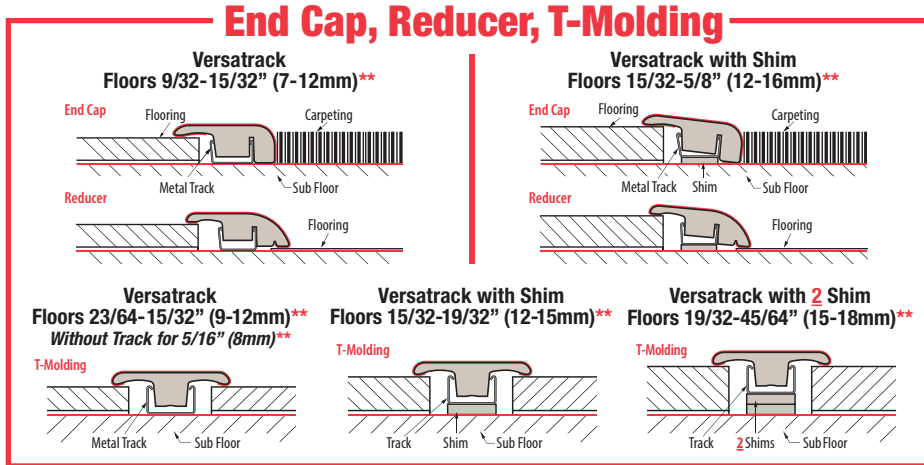

VersaEdge & VersaEdge Extra Tall

This is how the VersaEdge and VersaEdge Extra Tall Stair Nose covers floors up to an overall thickness of 3/4" (19mm).

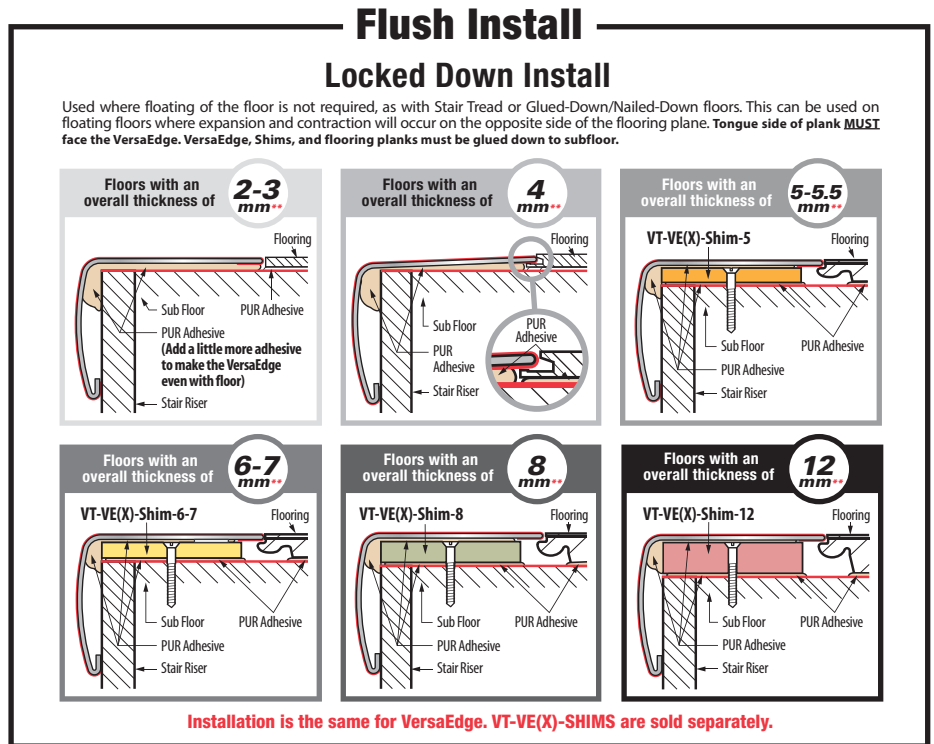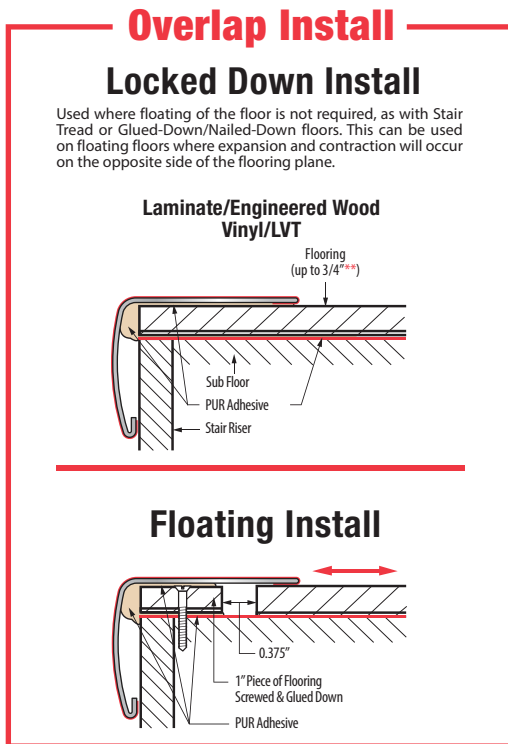

*The installation instructions shown on this page are suggestions of how to install our moldings. Versatrim does not assume responsibility for any product failure or liability due to installations that are in violation of the flooring manufacturer's installation guidelines and/or warranties.

**All references to flooring thickness refer to the total thickness of all members of the floor installation being laid upon the subfloor. This typically is comprised of the flooring plank, e.g. Vinyl or Laminate, the underlayment, either attached or loose lay and any additional vapor barriers.

Need Help Installing? Go to:
www.installationadvice.com


This website is provided as a convenience to our customers for simple Versatrim step-by-step installation instructions as PDFs and easy to follow videos.



Marketing Assistance

Display Board

Our 12" x 42" display board features the 8 Coordinating Moldings profiles: *Slim Trim*, *Slim Cap*, *VersaEdge*, *VersaEdge Extra Tall*, *Quarter Round*, *Moisture Proof End Cap*, *Moisture Proof Reducer*, and *Moisture Proof T-Molding*.

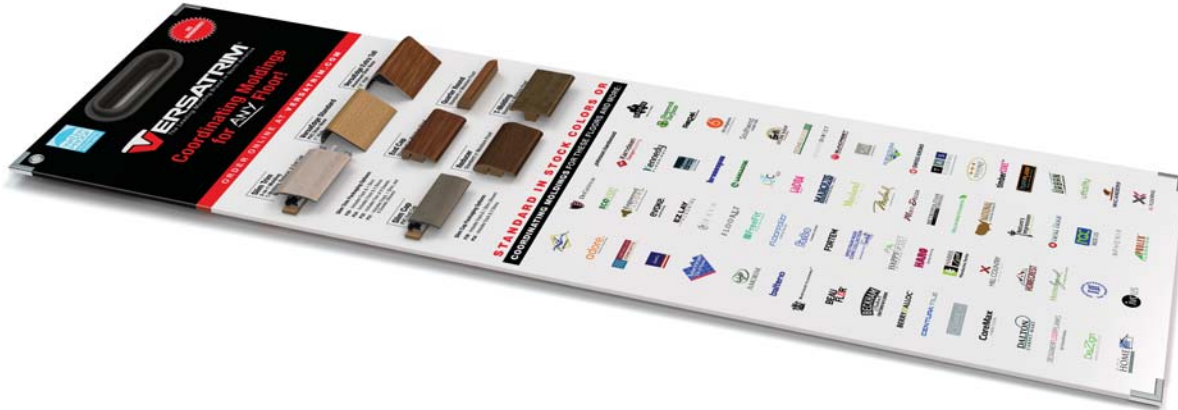

Profile Chain

The Versatrim Sample Chain represents most of our molding profiles and accessories: *Slim Track*, *VersaTrack Shim*, *Slim Cap*, *Slim Trim*, *VersaEdge*, *VersaEdge Extra Tall*, *Quarter Round*, *End Cap*, *Reducer*, *T-Molding*, *Versatrack*, *Wall Base*.



Standard Color Book

Our 3.75" x 8" color book fits conveniently in a pocket, drawer, or glove compartment and is handy any time you need to match our moldings to your floor. The book represents all standard colors which ship the same day on quantities less than 30 pieces if ordered by noon eastern time.



Quantities

	Quantities Per Tube		Quantities Per Box (Pallets Only)	
Moldings	Pieces Per 3" Tube	Pieces Per 6" Tube	Pieces Per Box	Boxes Per Pallet
SlimTrim	8	34	5	187
SlimCap	10	35	5	187
T-Molding	10	45	10	119
Reducer	10	40	10	119
End Cap	12	50	10	119
VersaEdge – Standard	8	40	5	187
VersaEdge Extra Tall	6	35	5	187
Stair Nose	4	19	5	66
Wall Base	NONE	10	5	99
Colonial Base	NONE	7	4	105
Quarter Round	13	50	10	187
Base Shoe	30	110	20	187

Accessories	Pieces Per 3" Tube	Pieces Per 6" Tube	Pieces Per Box	Boxes Per Pallet
Versatrim Shim (VT-Shim)	30	120	20	187
VT-VE(X)-Shim-5	30	120	20	187
VT-VE(X)-Shim-6-7	30	120	NONE	NONE
VT-VE(X)-Shim-8	12	55	NONE	NONE
VT-VE(X)-Shim-12	8	31	NONE	NONE
Versatrack Shim <small>Use with Versatrack and SlimTrack</small>	70	280	50	187
Versatrack	50	120	20	187
SlimTrack	80	140	40	187
Thin Track (Versatrim Thin)	50	160	Boxes of 20 or 50	187 or 119
Thick Track (Versatrim Thick)	30	110	20	187
Dowels - Tree of 8	NA	NA	1000	24

Quantities may vary when packaging option selected.

No Minimums to Order

Flat Rate Shipping Policy

Effective 1/4/21

Please contact our customer service department for shipping charges for Hawaii, Alaska and any location outside the United States of America.




Transit Time

*Transit times reflect **standard business days** which does not include Saturday or Sunday. **Saturday delivery may be available upon request at an additional cost.**

Lead times are for UPS Ground Shipments. LTL Shipments with trucking companies have a similar transit time, for exact transit times please contact your sales associate.

At your request we can also provide you with guaranteed rush shipments for an additional cost. Please inquire with your sales representative for more details.

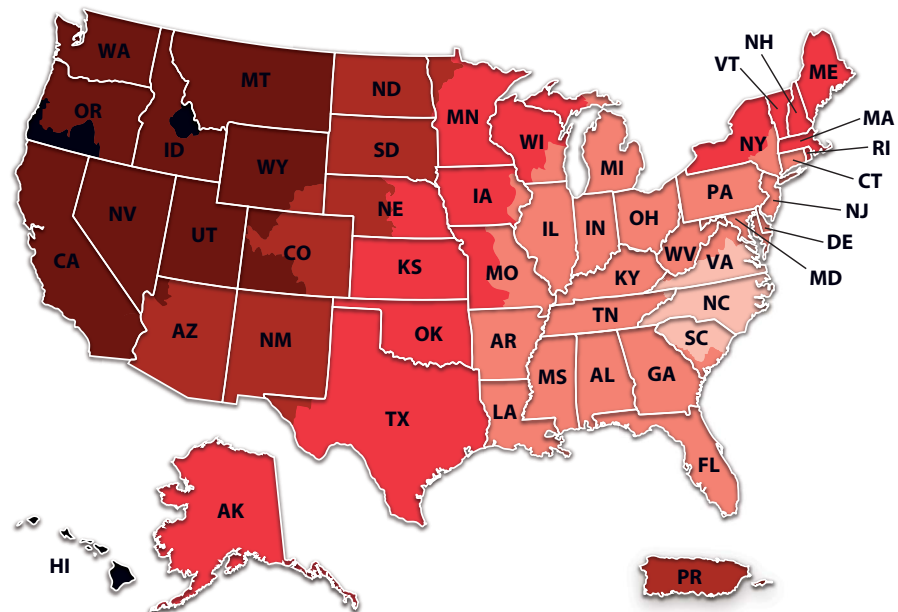

6 Days 5 Days 4 Days 3 Days 2 Days 1 Day

PRODUCTS

MARKETING ASSISTANCE

SHIPPING/LEAD TIME

MOLDING PROGRAMS

VERSATRIM PRICE LIST



How to Order

To Place an Order With Versatrim:

Fill out 2 forms to establish your credit terms:

- **Credit Application** – We also accept all major credit cards and certified checks in the event that you choose not to have open credit terms with us.
- **Company Contact Form** – This form will enable us to correctly identify your company, to expedite your orders and avoid mistakes.

Both forms are available on versatrim.com under the **How to Order** tab or contact your Sales Rep to have the forms sent to you

Place your order 1 of 4 ways:

- **Order Online** – Simply go to versatrim.com, select the **ONLINE ORDERING** tab and create an online account with us
- **Fax in a Completed Order Form** – Go to versatrim.com, select the **How to Order** tab and download an order form. Fax completed form to **252.430.8801**
- **Fax or Email Your Purchase Order from Your System** – Fax your PO to **252.430.8801** or email your PO to orders@versatrim.com
- **Call Us** – Contact our order desk by calling **1.866.200.8132, option 2**

Return Policy:

All returns are subject to approval. Call your sales representatives for details.

Molding Program Options

Stocking Inventory Program – 30 Piece Minimum Per Color And Shape

Versatrim can create custom coordinating trims for the floors you send to us. Once the matching process is complete and colors are approved, they will be available for you to order directly from Versatrim. Production will be required for volume quantities of 30 pieces or more in the same shape and color. This process can take up to 2 weeks for production and product to ship from our facility. Volume pricing is available if you qualify. Please contact your Inside Sales Representative at Versatrim for more information.

Quick Ship Program (Stock Colors) – No Minimums

Versatrim offers 59 colors that we keep in stock for quick ship purposes in certain profiles. We have a Standard Stock color board that displays the top colors in the program. We also have a color book to show the entire 59 color collection. Orders placed for these colors before 12:00 est. on a normal Versatrim business day will ship same day. Orders received after 12:00 pm est. will ship no later than the next business day.

Coordinating Molding Program (Cmp) – No Minimums

Versatrim will create custom coordinating moldings for the floors you send in which once approved would be added to our website www.versatrimorders.com and made available for any distributor or retailer to order. At this point you can begin to order directly from Versatrim. This would eliminate your need to inventory the moldings as we would inventory the surface material for your colors and would produce the moldings as they are ordered. Once colors are approved and set up in our system, the customer can expect a 2-3 business day lead time for any orders that are less than 30 pieces of the same shape and color to be shipped from our facility.

Combo Option: Cmp & Direct Ship/Stocking Program

Versatrim will create custom matches for the floors you send in which would be available for all to order. Once the matching process is complete all floors would be added to our website www.versatrimorders.com. You could then begin stocking, ordering as needed, or submitting orders to direct ship to your customers. We can look at volume/special price programs if you intend to stock. Unless the order is for one of our quick ship program colors and profiles, you can expect a 2-3 business day lead time for any orders that are less than 30 pieces of the same shape and color to be shipped from our facility.

Versatrim offers a limited number of free marketing materials and samples for all retailers, distributors, and manufacturers. Please refer to our marketing assistance tab for more information on these options.

For all program options, please send your floors to our print department at the below address:

Versatrim, Inc.
Attn: Print Department
101 Eastern Minerals Road
Henderson, NC 27537

Please contact your Versatrim Inside Sales Representative for more details on any programs to accommodate all of your molding needs.

Send Us Your Floor and We Will Create A Coordinating Trim. No Minimums! No Inventory!

In order to supply you with the best possible coordinating moldings, we need you to provide us with a **FULL BOX** of planks **36 inches or larger**. Planks less than 36" does not give us enough information to create a realistic coordinating molding for the floor.

To help you determine the best plank to send, please follow the guidelines below. **Obviously not all flooring can be perfect. Wood being a natural product will often have some imperfections. With this in mind, please send us the best plank possible.**

PROBLEM WOODS*

*What you put in is what you get out. Send us your best/favorite boards.



Dual Tone



Large Tone Change



Dirty Splotches/Grime/Stains



Large Lines



Character



Knots



Flower



Short Pieces (Less than 36 inches)

NOTE: If sending tile, make sure it doesn't have large patches of extreme differences in tone

PREFERRED PLANK

- Even Tones
- Grain is going in a straight line
- Clean
- Large/Long Pieces, At Least 36" Long



TiteGrab™

Advanced Polymer Adhesive
9.5 Fl. Oz


Contact Your Sales Rep for Individual or Case Prices and Freight Quote

CAN NOT SHIP WITH MOLDINGS



TiteGrab Quick Tips

- 1 One 9 oz. tube of TiteGrab covers roughly 20 linear feet, depending on angle & speed of application
- 2 Hold cartridge at 90° angle with V-Notch facing down to form ridge (see image)
- 3 Store above 60° for best results
- 4 Use a **Premium Caulking Gun with a 16:1 Thrust Ratio** – Don't go cheap!
- 5 Clean up with mineral spirits or acetone
- 6 **SINGLE USE ONLY!** The glue will cure within hours once the cartridge is opened.



Matching Stair Solutions**

Always a Perfect Match. Always Flush.


We use the actual floor to make the cap.

Lead Time: Approximately 15 Business Days


1 Piece Minimum

THIS CUSTOM PRODUCT IS MADE-TO-ORDER: Once an order is placed it can not be cancelled and the product can not be returned.

VersaCap Edge




VersaCap Square



CAN NOT SHIP WITH MOLDINGS

FLOOR TESTING REQUIRED BEFORE AVAILABILITY

VersaCap Edge Tread Edging

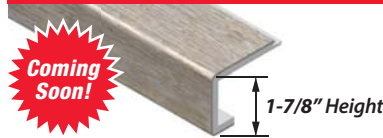

Additional Flooring Plank Needed to Make Complete Tread



VersaCap Square Tread Edging



Available in Edge and/or Square Depending on Floor Type

Available in Limited Manufacturers. Call for Details.

Primed Stair Riser**

Used to enhance stair landings.

Surface Material: White Primer

Material: Standard MDF

Available in White Primer Only

Riser-725-47-5Pack
(5 Piece Pack) FOB Henderson
Contact Your Sales Rep For Prices per 47\"/>

Riser-725-95-5Pack
(5 Piece Pack) FOB Henderson
Contact Your Sales Rep For Prices per 95\"/>

Riser-725-95-Bundle
(120 Piece Bundle) FOB Henderson
Contact Your Sales Rep For Prices per 95\"/>

SHIPPING*

Cost per Pack of 5

WEST

Includes WA, MT, OR, ID, WY, CO, UT, NV, CA, AZ and NM

EAST

Includes ME, NH, VT, MA, NY, RI, CT, NJ, DE, MD, PA, OH, MI, IN, WV, VA, NC, KY, IL, WI, SC, GA, FL, AL, TN, MS, LA, AR, MO, IA, MN, ND, SD, NE, KS, OK and TX

Contact Your Sales Rep For Shipping Rates per Pack (10 Pack Limit)


Contact Your Sales Rep For Shipping Rates per Pack (10 Pack Limit)

Contact Your Sales Rep For Shipping Rates per Pack (5 Pack Limit)

Contact Your Sales Rep For Shipping Rates per Pack (5 Pack Limit)

Contact Your Sales Rep For Freight Quote

This product is excluded from free shipping. CAN NOT SHIP WITH MOLDINGS

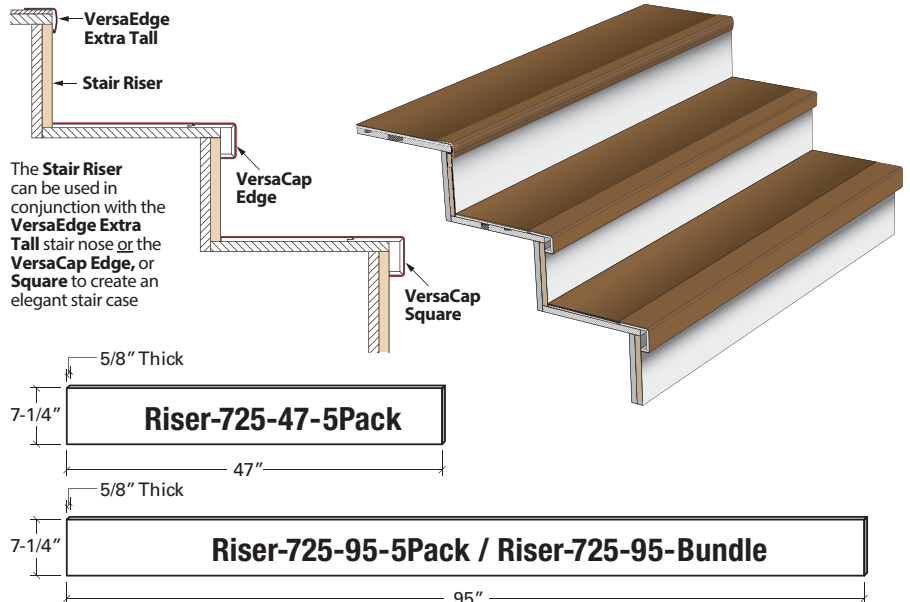

*For lower 48 Continental United States only. Please inquire with your Customer Service Representative for Alaska, Hawaii or any other location for freight quotes.

**The installation instructions shown on this page are suggestions of how to install our moldings. Versatrim does not assume responsibility for any product failure or liability due to installations that are in violation of the flooring manufacturer's installation guidelines and/or warranties.

***Since flooring thicknesses vary, to find the inside height dimension of your VersaCap, measure the thickness of your floor, multiply it by 2, and subtract it from the outside height.

Price List

(FOB Henderson, NC)

		Standard Stock Colors	Custom Colors/ Coordinating Moldings	Coordinating Moldings
Effective 10/8/21	Quantities	1 Piece	30 Pieces and Up***	1 to 29 Pieces
	Lead Time	2 Business Days on Most Items**	4 to 6 Weeks	Up to 4 Weeks
	Returns	Item is Returnable	Custom Product: Non-Returnable	Custom Product: Non-Returnable
SLT P29	 SlimTrim-P29 For Vinyl/LVT Floors Up to 6.35 mm (1/4")	CONTACT YOUR SALES REP FOR PRICES		
SLT P31	 SlimTrim-P31 For Vinyl/WPC/LVT/Laminate Up to 19 mm (3/4")			
SLT P32	 SlimTrim-P32 For Laminate Floors Up to 19 mm (3/4")			
SLT P33	 SlimTrim-P33 For Vinyl/LVT Floors Under 3 mm (1/8")			
SLT P54	 SlimTrim-P54 For WPC/LVT Floors 6.35 to 9.5 mm (1/4-3/8")			
	 Additional Dowel Tree Use with SlimTrim on Floors up to 19mm (3/4"). Contains 8 Dowels			
	 Additional SlimTrack Use in conjunction with Versatrack Shim on SlimTrim for floors up to 9.5 mm (3/8") and SlimCap for floors up to 12.7mm (1/2").			
	 Additional Versatrack Shim Use with SlimTrack for SlimTrim on 3-9.5mm floors, and SlimCap on 5-12.7mm floors			
SCAP P29	 SlimCap-P29 For Up to 9.5 mm (3/8") Floors			
SCAP P54	 SlimCap-P54 For 9.5 to 12.7 mm (3/8" to 1/2") Floors			
VE	 VersaEdge Stair Nose 1" Height			
VEX	 VersaEdge Extra Tall Stair Nose 1.5" Height			
	 VT-VE(X)-Shim-5 Use with VE or VEX for Optional Flush Install on 5-5.5 mm floors			
	 VT-VE(X)-Shim-6-7 Use with VE or VEX for Optional Flush Install on 6-7 mm floors			
	 VT-VE(X)-Shim-8 Use with VE or VEX for Optional Flush Install on 8 mm floors			
	 VT-VE(X)-Shim-12 Use with VE or VEX for Optional Flush Install on 12 mm floors			
EC	 End Cap <i>Hardware not included</i>			
TM	 T-Molding <i>Hardware not included</i>			
RD	 Reducer <i>Hardware not included</i>			
	 Versatrack - OPTIONAL For T-Molding on 9-12mm floors and Reducer & End Cap on 7-12 mm floors			
	 Versatrack Shim - OPTIONAL Use with Versatrack for T-Molding on 12-18mm floors and Reducer & End Cap on 12-16 mm floors			
	 Thin Track - OPTIONAL For Reducer, T-Molding, & End Cap on 7-9.5 mm floors			
	 Thick Track - OPTIONAL For Reducer, T-Molding, & End Cap on 9.5-12.3 mm floors			
SN	 Stair Nose			
	 Versatrim Shim For Stair Nose on 12 mm floors - OPTIONAL			
WB	 Wall Base 3.25" High			
CB	 Colonial Base 4.875" High			
QR	 Quarter Round Available in Standard or Moisture Proof			
BS	 Base Shoe			

All Moldings are 94" Long

Follow lead times above.

**Stock Color VersaEdge Extra Tall, SlimCap, and Moisture Proof Moldings (Reducer, End Cap, T-Molding, Stair Nose & Quarter Round) are non-returnable.

***Customer is expected to accept & pay for a 10% over or under run on Custom Color moldings.

Terms: Credit applications are under the "How To Order" tab on the Versatrim website.

ASK ABOUT OUR

MATCHING STAIR SOLUTIONS

ALWAYS FLUSH. ALWAYS A PERFECT MATCH.



**VersaCap
Edge**

1-7/8" Height

**Coming
Soon!**

**VersaCap
Square**

2-3/8" Height

Made from the Actual Floor

Lead Time: Approximately 15 Business Days

1 Piece Minimum

Available in Edge and/or Square Depending on Floor Type



Toll Free: **866-200-8132** • 101 Eastern Minerals Road • Henderson, NC 27537 USA • versatrim.com